

# CWSW200018SP3

GaAs MMIC SPDT Switch  
DC~18GHz

Rev 1.0

## Features

- Frequency Range: DC~18GHz
- Isolation: >40dB@18GHz
- Insertion Loss: 1.7dB@18GHz
- Control Voltage: 0/+5V
- Nanosecond Switch
- Size: 3mm×3mm×0.7mm


## Typical Applications

- Radar and ECM
- RF/ Microwave radio
- Military and Space
- Test and Measurement
- Fiber Optics

## General Description

CWSW200018SP3 is a general-purpose broadband high isolation reflective GaAs pHEMT SPDT switch in bare die. The switch offers over 40 dB isolation and less than 1.7dB insertion loss over operation frequency. Its fast switching and compact size make this absorptive SPDT ideal for many critical applications. The switch operates using complementary positive control voltage logic lines of 0/+5V.

## Functional Diagram

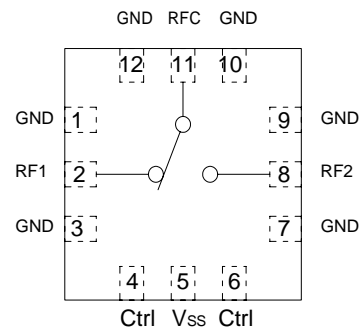

## Electrical Performance

( $T_A=25^{\circ}\text{C}$ , Control Voltage=0/+5V,  $50\Omega$ )

Parameter	Fre.	Min.	Typ.	Max.	Units
Insertion Loss	DC~18GHz	—	1.7	—	dB
Isolation	DC~18GHz	40	45	—	dB
VSWR RFC	DC~18GHz	—	1.3	1.6	:1
VSWR RF1,RF2 (ON)	DC~18GHz	—	1.3	1.6	:1
Switching Speed	DC~18GHz	—	30	—	ns

# CWSW200018SP3

GaAs MMIC SPDT Switch  
DC~18GHz

Rev 1.0

## Control Voltages

State	Bias Condition
Low	0~0.5V
High	3.0~5.5V

## Truth Table


Control Input	Signal Path State	
	RFC-RF1	RFC-RF2
Low	ON	OFF
High	OFF	ON

## Use the restriction parameter


input power	+23dBm
Storage temperature	-65°C~175°C
operating temperature	-55°C~85°C

## Typical Performance Curve

insertion loss

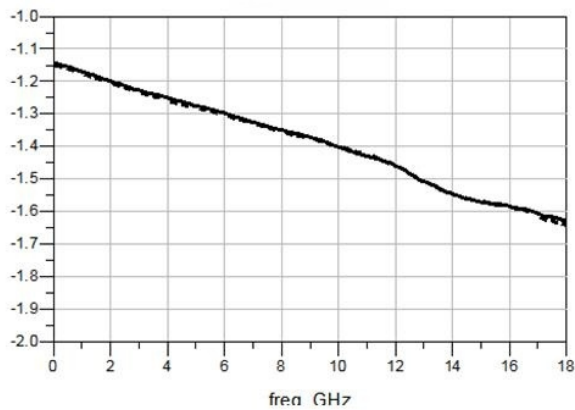



Open-state input return loss

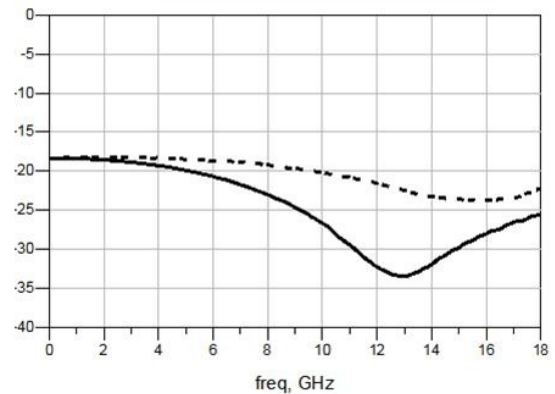

# CWSW200018SP3

GaAs MMIC SPDT Switch  
DC~18GHz

Rev 1.0

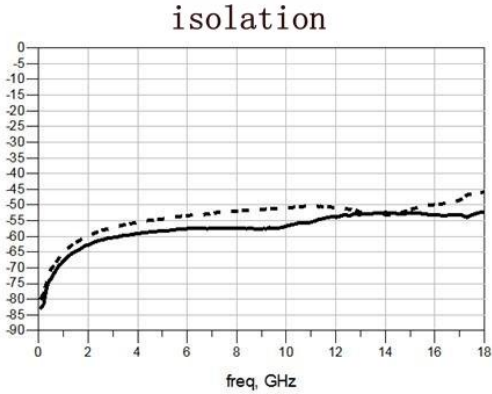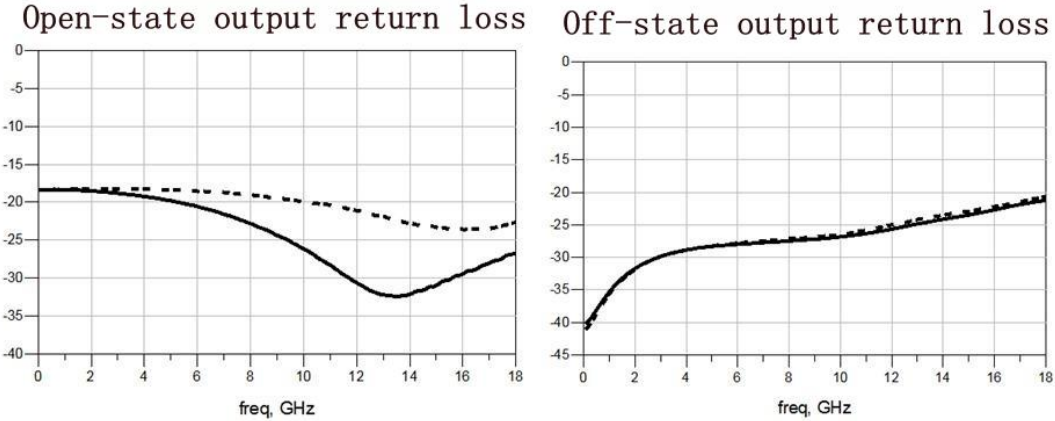


# CWSW200018SP3


GaAs MMIC SPDT Switch  
DC~18GHz

Rev 1.0

## Outline (All dimensions in mm)

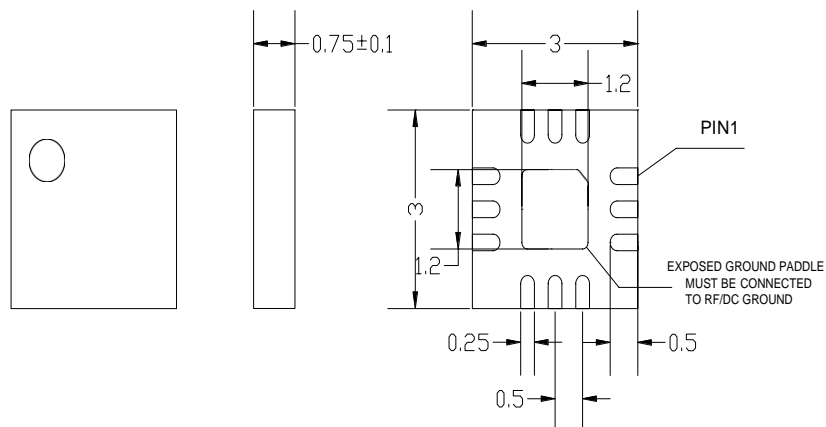

## Assembly Diagram

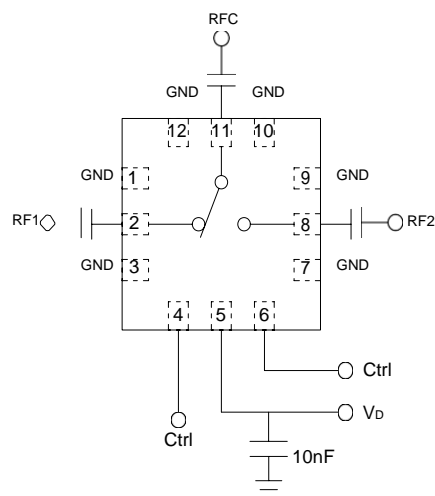

The two Ctrl ends are connected internally, and any Ctrl can be connected.

### Attention:

1. The moisture resistant grade of products is 2A, the storage environment  $\leq 30^{\circ} \text{C}/60\% \text{RH}$ , The surrounding workshop Life is 4 weeks. 2. After un-packing, it is necessary to bake the parts for 6 hours in  $125\pm 5^{\circ}\text{C}$  environment before soldering.